

CAF

36 · 48 · 60 PULGADAS



CAF - CORTINAS DE AIRE
36 - 48 - 60 PULGADAS



CAF

CAF 36, 48 y 60 pulgadas

Aplicaciones comerciales y todos los recintos donde se necesitan sistemas de control de ambiente con barrido de aire, evitando el paso de aire sucio e insectos, a alturas moderadas.

Aplicaciones



CENTROS
COMERCIALES



ESCUELAS



FAST
FOOD

Características técnicas

* Nivel sonoro medido de acuerdo a las normas AMCA 300/05 y 301/05

Modelo	Velocidad	Potencia W	Tensión Volts	Frecuencia Hz	Intensidad A	Caudal a descarga libre m³/hr / CFM	Potencia sonora LwA	Uniformidad@ 2mts	Peso neto aprox. Kg
CAF 36	Baja	177	220	60	-	781 / 460	69	79%	17
	Alta	413				1,036 / 610	75		
CAF 48	Baja	236	220	60	-	1,152 / 678	69	91%	20.6
	Alta	559				1,536 / 904	75		
CAF 60	Baja	271	220	60	-	1,505 / 886	63	90%	26.2
	Alta	692				2,057 / 1,211	76		



Soler y Palau S.A. de C.V. certifica que los modelos CAF 36, CAF 48, CAF 60 han sido aprobados para tener el sello de prestaciones certificadas por AMCA. Los valores de caudal, presión, uniformidad y potencia sonora que aquí se muestran, fueron obtenidos en ensayos y procedimientos desarrollados de acuerdo con las publicaciones AMCA 211, 311, 220 y cumplen con los requerimientos del programa de certificación AMCA. Los datos de Caudal-Presión, son certificados para Instalación Tipo A - Entrada Libre, Descarga Libre. Los datos de Ruido mostrados (Lw Total o LwA Total), fueron obtenidos en Instalación Tipo A, Entrada libre, Descarga libre. Los valores incluyen las pérdidas por accesorios.

Soler y Palau S.A. de C.V. certifies that the model CAF 36, CAF 48, CAF 60 shown herein is licensed to bear the AMCA certified ratings seal. The ratings shown are based on test and procedures performed, in accordance with AMCA publication 211, 311 and 220 comply with the requirements of the AMCA certified ratings program. Performance certified is for installation type A – Free inlet, Free outlet. Performance ratings include the effects of appurtenances (accessories). Values shown are for (total Lw or total LwA) sound power levels for: Installation Type A: free inlet, free outlet.


The AMCA Certified Ratings Seal applies to airflow rate, average outlet velocity, outlet velocity uniformity, velocity projection and power rating at free delivery only. Rated data shown are only for base (unheated) units, as shown. Performance data obtained from the correction factors shown herein are only an approximation and shall not be considered as part of the AMCA Certified Ratings.

CAF Rev. 01/May 2016




Dimensiones

CAF 36 CAF 48 :

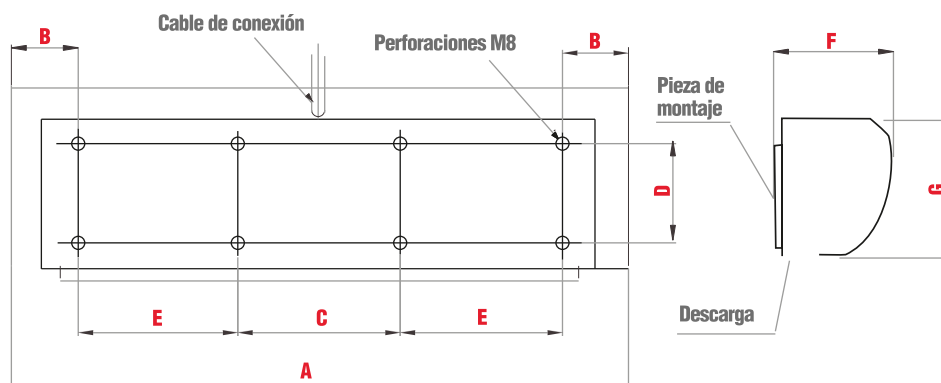

CAF 60 :

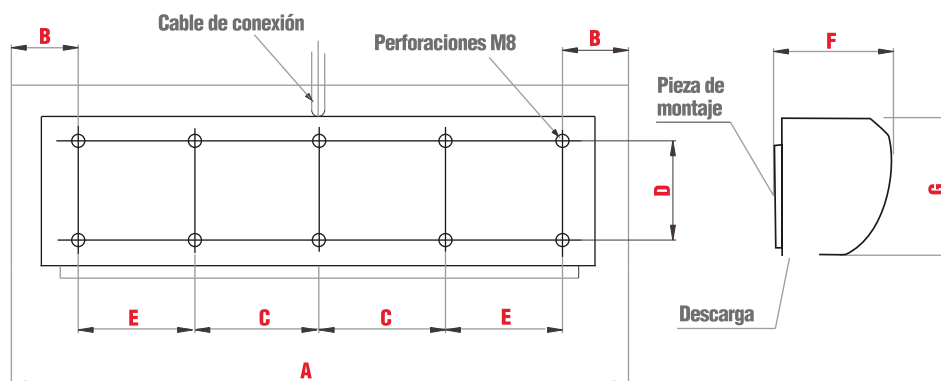

Dimensiones en mm

	CAF 36	CAF 48	CAF 60
A	900	1200	1500
B	105	105	90
C	230	330	330
D	120	120	120
E	230	330	330
F	212	212	212
G	230	230	230



CAF - CORTINAS DE AIRE
36 - 48 - 60 PULGADAS

Curvas de proyección

